


Enclosure	Flame Retardent ABS Plastic
Dimensions (H x W x D)	56 x 147 x 115 mm
Weight	150g
Supply Voltage	FCU Dependent
Consumption	2VA Max
Connection	RS485 & Proprietary

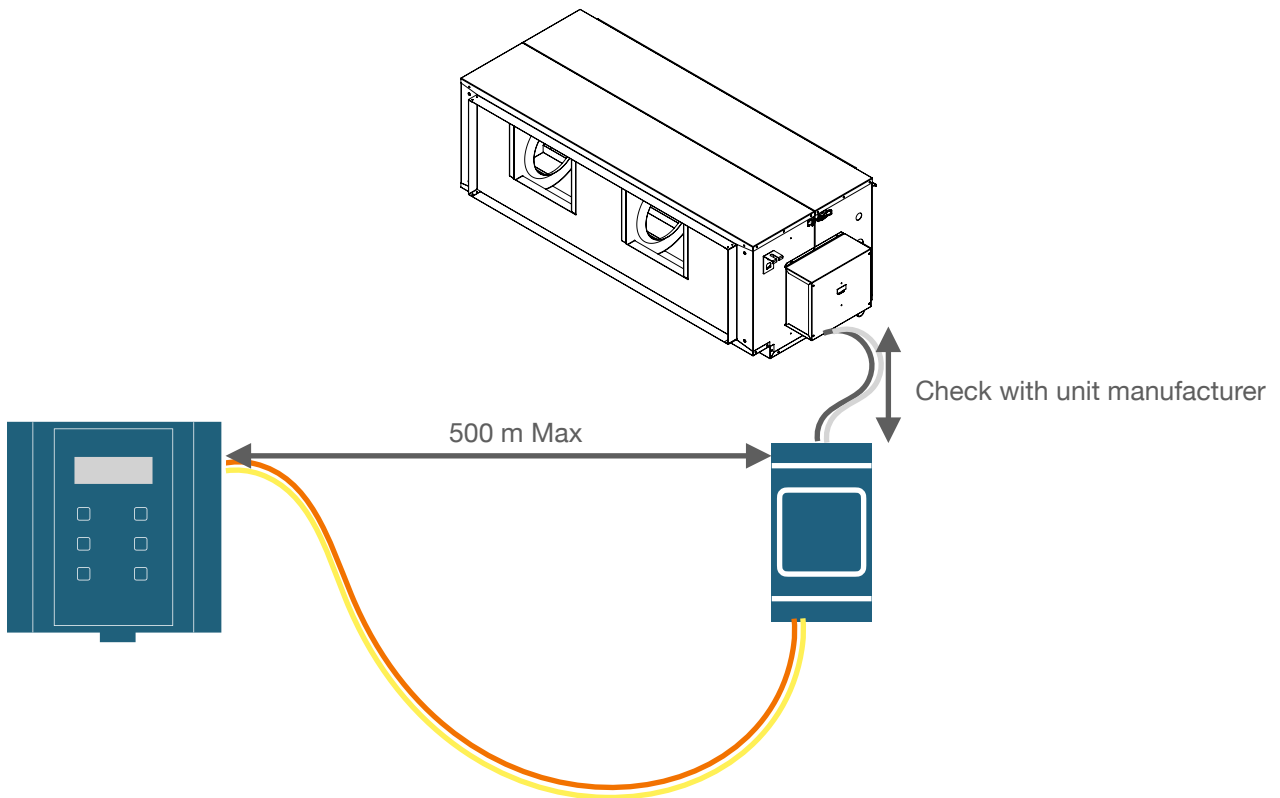

Touchpad Control Line Smart Gateways

CH-PCM-DKN-P1P2	Daikin Commercial	See compatibility list
CH-PCM-DKN-S21	Daikin Residential	See compatibility list
CH-PCM-ME-CN105	ME Commercial	See compatibility list
CH-PCM-MHI-XY	MHI Commercial	See compatibility list
CH-PCM-FUJ-RWB	Fujitsu Commercial	See compatibility list
CH-PCM-FUJ-CN65	Fujitsu Residential	See compatibility list
CH-PCM-PAN-R1R2	Panasonic Commercial	See compatibility list
CH-PCM-PAN-CN/CNT	Panasonic Residential	See compatibility list
CH-PCM-TSH-B/A	Toshiba Commercial	See compatibility list
CH-PCM=SMS-F4F3	Samsung above 18kW	See compatibility list
CH-PCM-SMS-F1F4V1V2	Samsung below 18kW	See compatibility list
CH-PCM-LG-BYR	LG Commercial	See compatibility list
CH-PCM-HIT-A/B	Hitachi Commercial	See compatibility list
CH-PCM-GREE-485	Gree Commercial	See compatibility list
CH-PCM-MID-CN10	Midea	See compatibility list

Touchpad Control Digital Input Gateways Gateways

CH-NEST-DKN-P1P2	Daikin Commercial	See compatibility list
CH-NEST-ME-CN	Mitsubishi Electric	See compatibility list